


REWARDING BRIGHTNESS

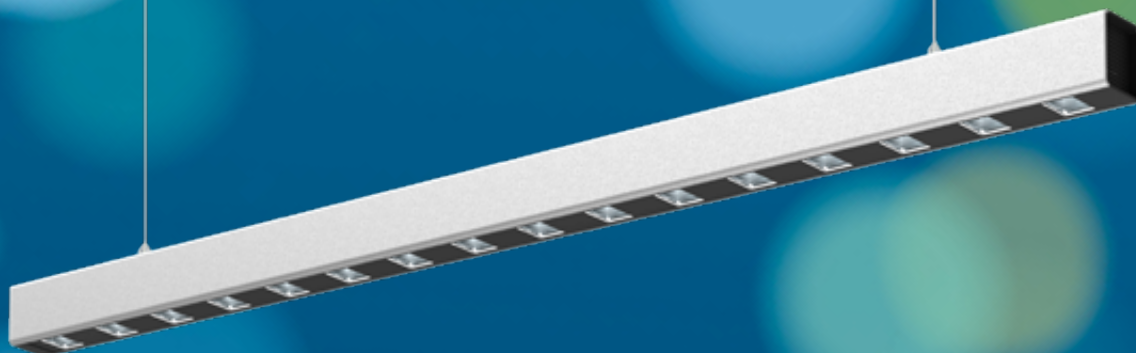


Profiles

**Aviora Line P**  
Pendent

**Specifications**

Colour	Matt black RAL 9005 (XX=BL) / Aluminium (XX=SA)
Beam angle (FWHM)	Standaard 85° (100° FWTM) / On request 75° (95° FWTM)
UGR (4H8H 70/50/20)	<19
Fixture material	Housing: Aluminium / Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN 62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years



This luminaire contains built-in LED lamps

The lamps cannot be changed in the luminaire.

874/2012



IP20

REWARDING BRIGHTNESS

## Item specifications (part A)

Description	Item code	Type	Input	W	Lm	Lm/W	CRI (typ.)	UGR	Pf	Inrush current	B-16A Fuse
Aviora Line P-D 3750 Lm 3000K No dim	3PDH03XXF202	Incl. PSU	220-240V	34,1	3750	110	83	17.0	0.95	5A 50µS	50 pcs
Aviora Line P-D 3750 Lm 3000K 1-10V & Push	3PDH03XXG202	Incl. PSU	220-240V	34,1	3750	110	83	17.0	0.96	5A 50µS	50 pcs
Aviora Line P-D 3750 Lm 3000K Dali	3PDH03XXH202	Incl. PSU	220-240V	34,1	3750	110	83	17.0	0.95	5A 50µS	50 pcs
Aviora Line P-D 3950 Lm 4000K No dim	3PDH03XXF302	Incl. PSU	220-240V	34,1	3950	116	83	17.2	0.95	5A 50µS	50 pcs
Aviora Line P-D 3950 Lm 4000K 1-10V & Push	3PDH03XXG302	Incl. PSU	220-240V	34,1	3950	116	83	17.2	0.96	5A 50µS	50 pcs
Aviora Line P-D 3950 Lm 4000K Dali	3PDH03XXH302	Incl. PSU	220-240V	34,1	3950	116	83	17.2	0.95	5A 50µS	50 pcs
Aviora Line P-D/I 1550/800 Lm 3000K No dim	3UDH03XXF202	Incl. PSU	220-240V	21,3	1550/800	110	83	16.6	0.95	5A 50µS	50 pcs
Aviora Line P-D/I 1550/800 Lm 3000K 1-10V & Push	3UDH03XXG202	Incl. PSU	220-240V	21,3	1550/800	110	83	16.6	0.96	5A 50µS	50 pcs
Aviora Line P-D/I 1550/800 Lm 3000K Dali	3UDH03XXH202	Incl. PSU	220-240V	21,3	1550/800	110	83	16.6	0.95	5A 50µS	50 pcs
Aviora Line P-D/I 1650/850 Lm 4000K No dim	3UDH03XXF302	Incl. PSU	220-240V	21,3	1650/850	117	83	16.9	0.95	5A 50µS	50 pcs
Aviora Line P-D/I 1650/850 Lm 4000K 1-10V & Push	3UDH03XXG302	Incl. PSU	220-240V	21,3	1650/850	117	83	16.9	0.96	5A 50µS	50 pcs
Aviora Line P-D/I 1650/850 Lm 4000K Dali	3UDH03XXH302	Incl. PSU	220-240V	21,3	1650/850	117	83	16.9	0.95	5A 50µS	50 pcs

## Item specifications (part B)


Description	Safety class	Energy class	Weight	Dimensions single carton	Quantity per pallet	Expected lifespan (25°C)		
						L70B50	L80B50	L90B50
Aviora Line P-D 3750 Lm 3000K No dim	I	A+	3920 gr	630x622x80 mm	22 pcs	134.000 hrs	82.000 hrs	37.000 hrs
Aviora Line P-D 3750 Lm 3000K 1-10V & Push	I	A+	3920 gr	630x622x80 mm	22 pcs	134.000 hrs	82.000 hrs	37.000 hrs
Aviora Line P-D 3750 Lm 3000K Dali	I	A+	3920 gr	630x622x80 mm	22 pcs	134.000 hrs	82.000 hrs	37.000 hrs
Aviora Line P-D 3950 Lm 4000K No dim	I	A+	3920 gr	630x622x80 mm	22 pcs	134.000 hrs	82.000 hrs	37.000 hrs
Aviora Line P-D 3950 Lm 4000K 1-10V & Push	I	A+	3920 gr	630x622x80 mm	22 pcs	134.000 hrs	82.000 hrs	37.000 hrs
Aviora Line P-D 3950 Lm 4000K Dali	I	A+	3920 gr	630x622x80 mm	22 pcs	134.000 hrs	82.000 hrs	37.000 hrs
Aviora Line P-D/I 1550/800 Lm 3000K No dim	I	A+	3920 gr	630x622x80 mm	22 pcs	134.000 hrs	82.000 hrs	37.000 hrs
Aviora Line P-D/I 1550/800 Lm 3000K 1-10V & Push	I	A+	3920 gr	630x622x80 mm	22 pcs	134.000 hrs	82.000 hrs	37.000 hrs
Aviora Line P-D/I 1550/800 Lm 3000K Dali	I	A+	3920 gr	630x622x80 mm	22 pcs	134.000 hrs	82.000 hrs	37.000 hrs
Aviora Line P-D/I 1650/850 Lm 4000K No dim	I	A+	3920 gr	630x622x80 mm	22 pcs	134.000 hrs	82.000 hrs	37.000 hrs
Aviora Line P-D/I 1650/850 Lm 4000K 1-10V & Push	I	A+	3920 gr	630x622x80 mm	22 pcs	134.000 hrs	82.000 hrs	37.000 hrs
Aviora Line P-D/I 1650/850 Lm 4000K Dali	I	A+	3920 gr	630x622x80 mm	22 pcs	134.000 hrs	82.000 hrs	37.000 hrs

## Choose your lumen output

Gegevens ontbreken nog!

Item	Direction	mA	W	Lumen Output		Lumen / Watt	
				3000K	4000K	3000K	4000K
Aviora Line D/U <b>Standard</b>	Up-light (1/3)	133	7,1	800	850	113	120
	Desk-light (2/3)	267	14,2	1550	1650	109	116
Aviora Line D/U <b>Special request</b>	Up-light (1/3)	213	11,4	1250	1325	110	116
	Desk-light (2/3)	427	21,3	2500	2625	117	123
Aviora Line D <b>Special request</b>	Desk-light	280	13,0	1650	1750	127	135
Aviora Line D <b>Special request</b>	Desk-light	400	21,3	2350	2500	110	117
Aviora Line D <b>Standard</b>	Desk-light	640	34,1	3750	3950	110	116

## Dimensions

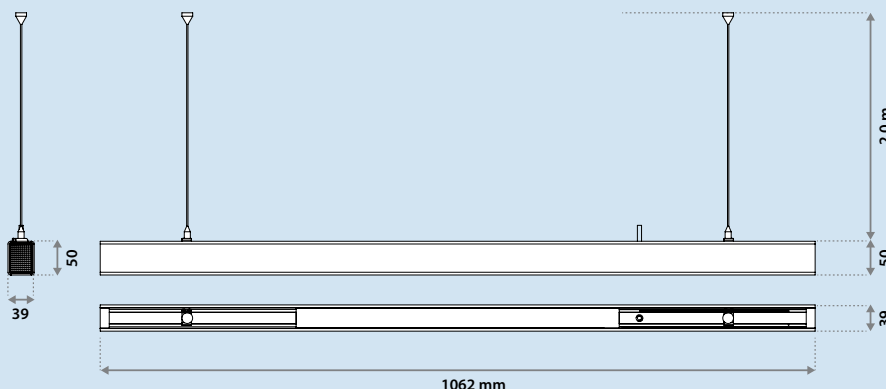

TCI<sup>LED</sup>  
PROFESSIONAL LIGHTING SYSTEMS

LUMILEDS

37C

wieland