

REWARDING BRIGHTNESS

With integrated GA-016 + PSU adapter, not visible after installation.




- Available colours
- Standard colour
- Special colours

Trackspots

Odion XS 3F

Specifications

Colour(s)	Matt white RAL9016 (XX=MW) / Matt black RAL 9005 (XX=BL) / Matt grey RAL 9006 (XX=GR). Front ring standard in black and special colours on request (white, blue, gold, silver and copper)
Beam angle (FWHM)	18° / 37° / 60°
UGR (4H8H 70/50/20)	<19 (18° + 37°)
Fixture material	Die cast aluminium / Polycarbonate
Environment	Indoor
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN 62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 Years



This luminaire contains built-in LED lamps

The lamps cannot be changed in the luminaire.

874/2012



IP20

REWARDING BRIGHTNESS

Item specifications (part A)

Description	18°		37°		60°		mA
	Item code	UGR	Item code	UGR	Item code	UGR	
Odion XS 3000 Lm 3000K CRI80 No dim	350403XXHK02	14.9	350403XXHL02	16.0	350403XXHM02	20.4	800
Odion XS 3000 Lm 3000K CRI80 Dali	350403XXE402	14.9	350403XXE502	16.0	350403XXE602	20.4	800
Odion XS 2400 Lm 3000K CRI96 No dim	350403XXHG02	14.2	350403XXHH02	15.2	350403XXHJ02	19.6	800
Odion XS 2400 Lm 3000K CRI96 Dali	350403XXE102	14.2	350403XXE202	15.2	350403XXE302	19.6	800
Odion XS 3400 Lm 4000K CRI80 No dim	350403XXHN02	15.4	350403XXHP02	16.4	350403XXHQ02	20.8	800
Odion XS 3400 Lm 4000K CRI80 Dali	350403XXE702	15.4	350403XXE802	16.4	350403XXE902	20.8	800

Item specifications (part B)

Description	W	Lm	Lm/W	CRI (typ.)	Pf	Ripple	Inrush current	B-16A Fuse	Safety class	Energy class
Odion XS 3000 Lm 3000K CRI80 No dim	32,1	3000	98	82	0.97	<3%	5A 50µS	50	I	A+
Odion XS 3000 Lm 3000K CRI80 Dali	32,1	3000	98	82	0.97	<3%	5A 50µS	50	I	A+
Odion XS 2400 Lm 3000K CRI96 No dim	32,1	2400	93	96	0.97	<3%	5A 50µS	50	I	A+
Odion XS 2400 Lm 3000K CRI96 Dali	32,1	2400	93	96	0.97	<3%	5A 50µS	50	I	A+
Odion XS 3400 Lm 4000K CRI80 No dim	32,1	3400	92	82	0.97	<3%	5A 50µS	50	I	A+
Odion XS 3400 Lm 4000K CRI80 Dali	32,1	3400	92	82	0.97	<3%	5A 50µS	50	I	A+

Item specifications (part C)


Description	Weight	Dimensions single carton	Quantity per carton	Expected lifespan (25°C)		
				L70B50	L80B50	L90B50
Odion XS 3000 Lm 3000K CRI80 No dim	840 gr	251x241x123 mm	12 pcs	131.000 hrs	80.000 hrs	35.000 hrs
Odion XS 3000 Lm 3000K CRI80 Dali	840 gr	251x241x123 mm	12 pcs	131.000 hrs	80.000 hrs	35.000 hrs
Odion XS 2400 Lm 3000K CRI96 No dim	840 gr	251x241x123 mm	12 pcs	131.000 hrs	80.000 hrs	35.000 hrs
Odion XS 2400 Lm 3000K CRI96 Dali	840 gr	251x241x123 mm	12 pcs	131.000 hrs	80.000 hrs	35.000 hrs
Odion XS 3400 Lm 4000K CRI80 No dim	840 gr	251x241x123 mm	12 pcs	131.000 hrs	80.000 hrs	35.000 hrs
Odion XS 3400 Lm 4000K CRI80 Dali	840 gr	251x241x123 mm	12 pcs	131.000 hrs	80.000 hrs	35.000 hrs

Choose your lumen output (MLM)

	mA	W	Lumen Output			Lumen / Watt			UGR								
			CRI80	CRI96	CRI80	CRI80	CRI96	CRI80	CRI80 3000K			CRI96 3000K			CRI80 4000K		
			3000K	3000K	4000K	3000K	3000K	4000K	18°	37°	60°	18°	37°	60°	18°	37°	60°
<i>Special request</i>	700	27,6	2700	2200	3150	98	94	114	14.6	15.6	20.0	13.9	14.9	19.3	15.1	16.2	20.6
Standard	800	32,1	3000	2500	3400	93	78	106	14.9	16.0	20.4	14.2	15.2	19.6	15.4	16.4	20.8
<i>Special request</i>	850	33,6	3100	2600	3850	92	72	104	15.0	16.1	20.5	14.3	15.3	19.8	15.5	16.5	20.9

All values are measured at 230V (+/- 7%)

Dimensions

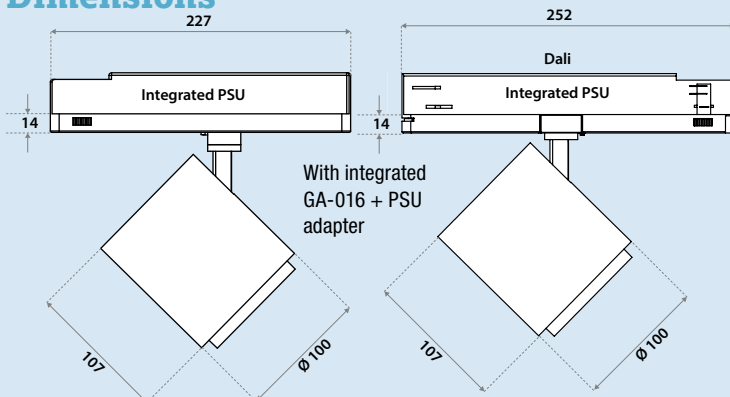

Tracks



On request! Ask our sales department about the possibilities.

Extra LED options

LEDs from the LUXEON Stylist Series
Specially developed for shops specialised in fashion or fresh food, and for restaurants. Ask our sales department about the possibilities.



TCI
LTD
DISTRIBUTOR OF ALL ILLUXTRON

NORDIC ALUMINIUM

TE
connectivity